


EasyTRACK Plus for Line Lasers

Optimum alignment - the quick and easy way

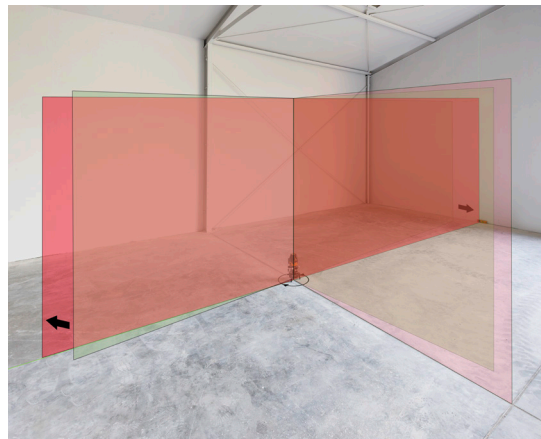

TECHNICAL DATA		EASYTRACK BASE	FEATURES	SUPPLIED WITH EASYTRACK
				ART.-NO. 290900
Centring accuracy TRACKING		± 1 mm	<ul style="list-style-type: none">· 360° horizontal orientation in motorised mode· Automatic axis alignment of the vertical line with on-level position of receiver (tracking)*· Alignment of the vertical line to any position with the remote control**· Manual slow motion screw for axis alignment· For line lasers with either red or green beam<ul style="list-style-type: none">* Compatible with CrossPointer5 GREEN, Geo6-XR GREEN, FL 40-PowerCross Plus/ GREEN, Geo1X-360 GREEN, Geo6X/ GREEN, FLG 64-GREEN, FLG 66-Xtreme, FL 70, FL 1000** Compatible with any line laser (geo-FENNEL and other brands) except FL 70	<ul style="list-style-type: none">· EasyTRACK Base· EasyTRACK Receiver· EasyTRACK Remote control· 4 x AA batteries (Base)· 3 x AA batteries (Receiver)· 1 x 9V battery (Remote Control)· Soft bag
Working range radius		50 m (depending on laser model)		
Instrument connection		5/8" and 1/4"		
Power supply / operating time		4 x AA Alkaline / 15 h		
Temperature range		-10°C to +50°C		
Dust / water protection		IP 54		
TECHNICAL DATA		EASYTRACK RECEIVER		
Accuracy		± 1 mm		
Display		Front, back and side LED		
Temperature range		-10°C to +50°C		
Power supply / operating time		3 x AA Alkaline / 50 h		
Tones		3 (switchable)		
Automatic shut-off		yes		
Dust / water protection		IP 54		

- 360° horizontal orientation in motorised mode
 - Automatic axis alignment of the vertical line with on-level position of receiver (tracking)*
 - Alignment of the vertical line to any position with the remote control**
 - Manual slow motion screw for axis alignment
 - For line lasers with either red or green beam
- * Compatible with CrossPointer5 GREEN, Geo6-XR GREEN, FL 40-PowerCross Plus/ GREEN, Geo1X-360 GREEN, Geo6X/ GREEN, FLG 64-GREEN, FLG 66-Xtreme, FL 70, FL 1000
- ** Compatible with any line laser (geo-FENNEL and other brands) except FL 70